

FORGED STEEL GATE VALVES, BONNETLESS - FIG 06.6

ASME CLASS 1500 / 2500 (4500)
 API CLASS 6.000 PSI (10.000 PSI)
 DIN CLASS PN 160 - PN 640




STANDARDS

DESIGN ASME B16.34 - BS-EN 15761 - DIN 3840 - EN 12516
 BUTTWELDING ENDS ASME B16.25 - DIN-EN 9692-1 - EN 12627
 SOCKET WELDING ENDS ASME B16.11 - EN 12760
 OTHER END CONNECTIONS API OR NPT FEMALE THREADS / CLAMP CONNECTORS / FLANGED RTJ OR RF
 END-TO-END DIMENSIONS MANUFACTURER'S STANDARD (FLANGED VALVES ACC. THE RELEVANT STANDARD)
 PRESSURE TESTING ASME B16.34 - API 598 - DIN 3230 - EN 12266

MATERIALS

01 BODY	VARIOUS (SEE BELOW)
02 SEAT	STELLITE(D)
03 WEDGE	STELLITE
04 LOOSE BACKSEAT	AISI 304
05 STEM PACKING	GRAPHITE
07 GLAND FLANGE	CARBON STEEL
08 GLAND	AISI 304
09 GLAND BOLT / NUT	ASTM-A193-B7 / ASTM-A194-2H
10 STEM	17 CR (SEE BELOW)
12 YOKE	CARBON STEEL
13 YOKE SLEEVE	ALUMINIUM-BRONZE
14 HANDWHEEL	CARBON STEEL
21 NUT	STEEL ZINC PLATED
27 SPRINGWASHER	STEEL ZINC PLATED
28 SPRINGWASHER	STEEL ZINC PLATED
44 NAMEPLATE	ALUMINIUM
50 PIN	HARDENED STEEL

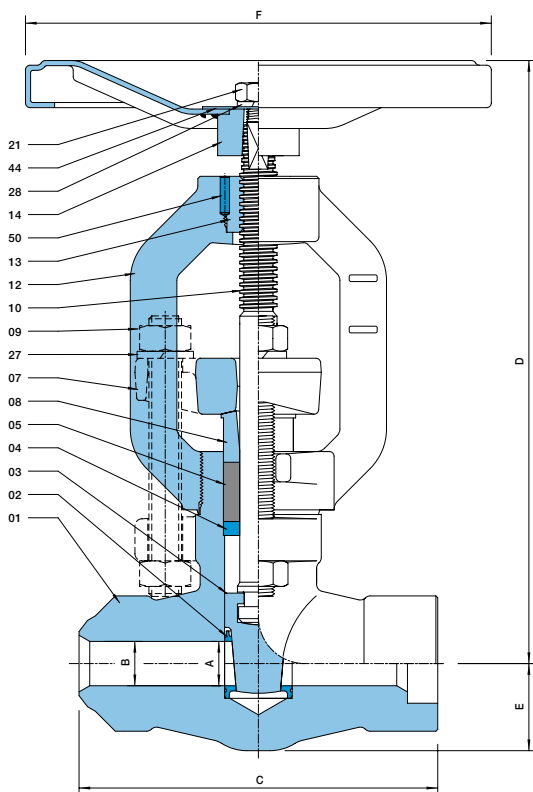

FEATURES

DESIGN	CONSTRUCTION	INTEGRAL BONNET (BONNETLESS) AND LOOSE BACKSEAT
	SEAT	HIGH TEMPERATURE VACUUM BRAZED IN STELLITE SEAT OR WELDED IN STELLITED SEAT RINGS
	OPERATION	OPTIONAL NON-ROTATING STEM FOR ELECTRIC OR PNEUMATIC ACTUATOR
	ACCESSORIES	LIMIT SWITCHES - LOCKING DEVICE - POSITION INDICATOR - LIVE LOADED GLAND (OTHERS ON REQUEST)
MATERIALS	BODY	SA105N - SA350-LF2 - SA182-F12 - SA182-F22 - SA182-F316(L) - SA182-F51 - SA182-F91
	TRIM	17CR/STELLITE - F316/STELLITE - F51/STELLITE (OTHERS ON REQUEST)
	STEM PACKING	GRAPHITE WITH INTEGRAL OR STAINLESS STEEL REINFORCED ANTI EXTRUSION RINGS

MAIN DIMENSIONS IN MM (INCH)

NOM. SIZE	A	B	C	D	E	F	Cv	WEIGHT KG
10 (3/8")	-	7 (0.28)	132 (5.20)	225 (8.86)	25 (0.98)	150 (5.91)	2.2	3.5 (7.7 LB)
15 (1/2")	-	11 (0.43)	132 (5.20)	225 (8.86)	25 (0.98)	150 (5.91)	6.0	3.4 (7.5 LB)
20 (3/4")	-	15 (0.59)	137 (5.39)	282 (11.10)	38 (1.50)	200 (7.87)	11.2	6.7 (14.8 LB)
25 (1")	-	19 (0.75)	154 (6.06)	282 (11.10)	38 (1.50)	200 (7.87)	21.5	6.5 (14.3 LB)
32 (1-1/4")	28.5 (1.12)	30 (1.18)	192 (7.56)	455 (17.91)	72 (2.83)	350 (13.78)	42.9	30.0 (66.1 LB)
40 (1-1/2")	28.5 (1.12)	30 (1.18)	192 (7.56)	455 (17.91)	72 (2.83)	350 (13.78)	42.9	30.0 (66.1 LB)
50 (2")	38 (1.50)	40 (1.57)	192 (7.56)	455 (17.91)	72 (2.83)	350 (13.78)	77.8	28.0 (61.7 LB)

HP Valves Oldenzaal BV, P.O. Box 151, 7570 AD Oldenzaal, The Netherlands
 Phone: +31 (0)541 519555, Fax: +31 (0)541 522045, E-mail: info@hpvalves.com
 Website: www.hpvalves.com

